

RE 16-5 115, Kit B-Jet


RETECFLEX - the universal tool for renovation and modernization

Order no. 505021

GTIN 4030293230767



- + Microprocessor control: speed selection, tachogenerator constant speed control, soft start, restart protection after power failure, overload protection and temperature monitoring
- + Motor: powerful, strong motor for quick working progress
- + Anti-Kickback - this shuts down the motor on the tool being blocked
- + Completely cast electronic components prevents damage due to metal dust. The 3-fold winding protection reduces motor wear, increases service life
- + Special gearbox: special gear ratio for high torque in the medium and low speed range
- + With steplessly adjustable, vibration-proof, ergonomic bail handle, for optimum handling and machine control
- + Dust-proof on/off switch
- + Effective dust extraction thanks to a large extraction cross-section. Simple, quick connection using the FLEX clip-system. No adapters or reducing sleeves are required
- + Extraction hood: with stepless height adjustment
- + Universal tool system can be adapted for a large number of renovation and modernisation applications. Compact, handy and ideal for working on small surfaces and on the edges of larger areas
- + Spindle lock
- + Diamond grinding disc suitable for grinding concrete parts, roughing old weathered concrete, hard cement plaster, removing shuttering protrusions and concrete runs, hardened epoxy resin coatings and the natural sintering on concrete components. High grinding capacity and service life from the innovative segment design. Optimal ground preparation for further coating.

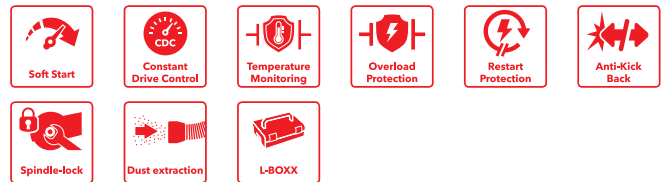

Technical data

| | |
|---------------------------------|-------------------|
| Power consumption | 1600 W |
| Power output | 950 W |
| Voltage | 230 V |
| Disc diameter | 115 mm |
| Scouring head diameter | 80 mm |
| Max. milling depth | 6 mm |
| No-load speed | 1900 - 5500 rpm |
| Tool holder, renovation grinder | Other |
| Cable length | 4,0 m |
| Dimensions WxLxH | 355 x 160 x 67 mm |
| Weight | 3,1 kg |

Standard equipment

- 1 Concrete-Jet diamond grinding disc (503053)
- 1 Extraction hood (366528)
- 1 Base for scouring work (369314)
- 1 Hook-and-loop backing pad Ø 115, Bowl (503754)
- 1 Ring hole spanner, SW 13 (505072)
- 1 Face pin spanner (392537)
- 1 Hexagon socket wrench (102229)
- 1 Carrying case L-BOXX® (414093)
- 1 Case insert (414182)
- 1 Corundum sanding disc set Ø 115
- 3 Fastening screws, M 8
- 1 Bail handle