
this is proformance



IW 1/2" 750 18.0-EC C

Cordless impact wrench 18,0 V Order no. 530231

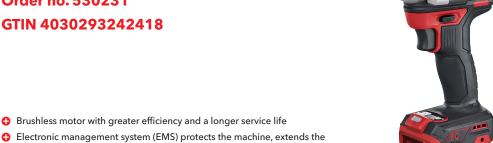

- service life, and increases efficiency
- Tool holder square drive for 1/2" impact sockets.
- Electronic quick-acting brake
- Damping element seperates hand grip from motor, bringing significant reduction in vibration transmission
- Powerful impact mechanism for maximum performance enables for example stuck or rusted screw connections to be loosened even in extreme applications
- Speed command: Possibility of setting three different speed ranges for different applications and controlled tightening or loosening
- Accelerator trigger with lock-off switch
- c Ergonomically designed, non-slip, soft grip handle
- Integrated LED lamp with persistence function
- LED battery capacity display
- FLEX battery system: suitable for all FLEX 18 V battery packs. Delivery does not include battery and charger
- Right/left rotation with safety catch
- 4 Auto-Stop mode: When tightening, the machine stops as soon as the blow starts. When loosening, the machine stops as soon as the blow stops. Suitable to prevent over-tightening of the screw or nut.
- Compact design with die-cast aluminium machine head. Extremely durable and impact-resistant





Technical data

| iceimicai data | |
|-----------------------------|--------------------|
| Battery voltage | 18,0 V |
| Battery capacity | 2,5 / 5,0 / 8,0 Ah |
| Torque settings | 3 Steps |
| Max. torque, setting 1 | 150 Nm |
| Max. torque, setting 2 | 200 Nm |
| Max. torque, setting 3 | 750 Nm |
| No-load speed, 1st gear | 0 - 500 rpm |
| No-load speed, 2nd gear | 0 - 1000 rpm |
| No-load speed, 3rd gear | 0 - 2100 rpm |
| No-load blows, setting 1 | 0 - 1000 1 rpm |
| No-load blows, setting 2 | 0 - 2000 1 rpm |
| No-load blows, setting 3 | 0 - 2450 1 rpm |
| Tool holder, impact drill | 1/2" outside |
| Dimensions WxLxH | 159 x 74 x 227 mm |
| Weight without battery pack | 1,9 kg |
| | |

Standard equipment

1 Belt clip (430714)