

# BBE 14-3 110


Brushing machine TRINOXFLEX

Order no. 471097

GTIN 4030293210516



- + Unique tool attachment with quick-action coupling for tool-free change of the system attachments: for burnishing, pipe belt sanding and brushing
- + Brush attachment with detachable protective cover and suction connection Ø 32 mm for low-dust work. Including guide stop for calendering narrow workpieces for a rectilinear grinding pattern
- + Tool-free grinding tool change via a patented quick-change system
- + For low-dust work in the metal and stainless steel area. Also for brushing, structuring and cleaning wood surfaces
- + Microprocessor control: speed selection, tachogenerator constant speed control, soft start, restart protection after power failure, overload protection and temperature monitoring
- + Completely cast electronic components prevents damage due to metal dust. The 3-fold winding protection reduces motor wear, increases service life
- + Spindle lock

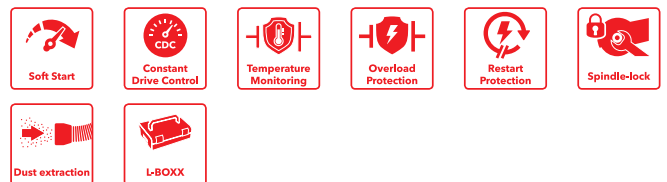

## Technical data

Power consumption	1400 W
Power output	880 W
Voltage	230 V
Frequency	50/60 Hz
No-load speed	1000 - 3500 rpm
Brush diameter	120 mm
Brush width	100 mm
Tool fixture, brush sander	19mm
Cable length	4.0 m
Dimensions WxLxH	335 x 190 x 210 mm
Weight	2.9 kg

## Standard equipment

- 1 Sanding attachment, brushing (461555)
- 1 Carrying case L-BOXX® (414093)
- 1 Case insert (451991)