

PE 14-2 150


POLISHFLEX, variable-speed polisher with a high torque

Order no. 373680

GTIN 4030293148109



- + Powerful 1400 watt motor with highly-efficient ventilator for optimum cooling
- + Optimised air flow for optimum cooling of motor and gear. No annoying exhaust air for the user
- + Innovative combination of planetary and angular gears reduces noise to an absolute minimum
- + Continuous speed control trigger: for a gentle start (starting speed at setting 1 (380 rpm)) and a lock-on for continuous operation
- + Microprocessor electronics: stepless speed selection, tachogenerator-controlled constant speed, overload protection, re-start protection and temperature monitoring
- + Flat gear head reduces distance to the surface. The machine can therefore be operated safely in any position.
- + Grip hood: ergonomically shaped with SoftGrip. The machine can be controlled with precision and is always comfortable yet secure to hold.
- + With rubberised resting bar for safe setting down
- + Spindle lock: It is ideally positioned to prevent operating error and does not interfere with the grip area.
- + 4 metres PUR H05-BQF cable: wear-resistant, flexible and highly resistant to cuts and abrasions

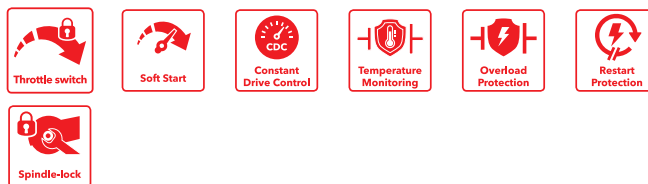

Technical data

| | |
|--------------------------|-------------------|
| Power consumption | 1400 W |
| Power output | 880 W |
| Voltage | 230 V |
| Frequency | 50/60 Hz |
| Max. polishing disc size | 200 mm |
| Max. support plate size | 150 mm |
| No-load speed | 380 - 2100 rpm |
| Cable length | 4.0 m |
| Cable type | PUR |
| Dimensions WxLxH | 405 x 84 x 117 mm |
| Weight | 2.3 kg |

Standard equipment

1 Handle (450774)