

# LD 16-8 125 R, Kit E-Jet


Compact renovation grinder for dust-free grinding close to edges, 125 mm

Order no. 504955

GTIN 4030293230705



- + Electronic control: with tachogenerator constant speed control, soft start, overload protection and temperature monitoring
- + Dust extraction: prevents dust nuisance, reduces disc wear, keeps the concrete pores open for the new coating
- + Reliable 1600 watt high-performance motor with sufficient power reserves
- + Anti-Kickback - this shuts down the motor on the disc being blocked
- + Guard with pivoting segment to allow grinding right up to the wall. Height-adjustable to the disc height and for optimum dust extraction
- + With steplessly adjustable, vibration-proof, ergonomic bail handle, for optimum handling and machine control
- + For fast hose connection. FLEX clip connection for Ø 32 mm snap connection included in the standard equipment
- + Recessed spindle lock, to avoid unintentional activation
- + Ideally suited for processing walls, ceilings and floors. Efficient and economic working thanks to optimum coordination between machine and sanding disc
- + Grinding disc for abrasive materials. For removal of formwork transitions and concrete runs from freshly concreted surfaces, mineral adhesives, screeds, plaster, mortar, abrasive lime sand brick, sandstone, chamotte, asphalt.

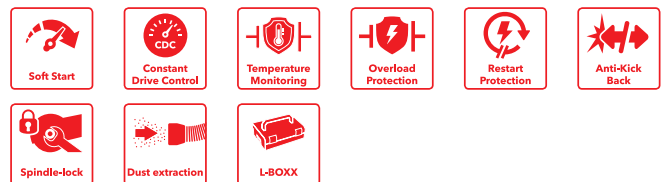

## Technical data

Power consumption	1600 W
Power output	950 W
Voltage	230 V
Frequency	50/60 Hz
Disc diameter	125 mm
No-load speed	7800 rpm
Tool holder, renovation grinder	M14
Cable length	4,0 m
Weight	3,1 kg

## Standard equipment

- 1 Screed-Jet diamond grinding disc (359394)
- 1 Extraction hood with pivoting edge segment (498475)
- 3 Cable clip (252188)
- 1 Hexagon socket wrench (102229)
- 1 Face pin spanner (392537)
- 1 Carrying case L-BOXX® (414093)
- 1 Case insert (414131)
- 1 Bail handle